

PRODUCT AND COLOUR GUIDE

Interior | Exterior | Trims and more



We promise
you'll love
your home



Durability
Coverage
Finish

AkzoNobel



Index

Colour Help 3-8

Quality Paint Systems For Each Surface	3-4
With You At Every Step	5-6
Easy to Use Colour Combinations	7-8

Interior 9-20

How to Prepare a Room for Painting	9-10
Dulux Luxurious Silk	11-12
Dulux Easycare	13-14
Dulux Bathroom +	15-16
Dulux PearlGlo Water-Based	17-18
Dulux PearlGlo Solvent-Based	19-20

Interior/ Exterior 21-26

How to Paint a Door	21-22
Dulux Acrylic PVA	23-24
Dulux Gloss Enamel	25-26

Exterior 27-34

Dulux Weatherguard Fine Texture	27-28
Dulux Weatherguard Ultra Smooth	29-30
Dulux Wallguard	31-32
Dulux Roofguard	33-34

Product 35-37

Dulux Pre-Paint	35-36
Dulux Primers & Undercoats	37-38
How to Clean and Store Brushes and Rollers	39-40
Dulux Product Summary	31-42

QUALITY PAINT SYSTEMS FOR EACH SURFACE

Here's how Dulux can help you start your transformation

Primers & Undercoats

✓ Primers for Masonary

- A. Dulux Plaster Primer
- B. Dulux Bonding Liquid

✓ Primers for Metal

- A. Dulux Galvanised Iron Primer
- B. Dulux Steel Primer
- C. Dulux Rustshield
- D. Dulux Supergrip
- E. Hammerite Special Metal Primer
- F. Hammerite No. 1 Rustbeater Primer

✓ Primers for Wood

- A. Dulux Wood Primer
- B. Dulux Supergrip

✓ Primers for Special Surfaces

- (Ceramic Wall Tiles, Rigid PVC, Glass)
- A. Dulux Supergrip

✓ Intermediate Coats

- A. Dulux Universal Undercoat

Speciality Products

- A. Dulux Rainshield
- B. Dulux Brick Dressing

Preparation

- A. Dulux Pre-Paint Sugar Soap
- B. Dulux Pre-Paint Interior Crackfiller
- C. Dulux Pre-Paint Multipurpose Crackfiller
- D. Dulux Pre-Paint Interior/Exterior Quicksetting Cement
- E. Dulux Pre-Paint Smoothover
- F. Dulux Pre-Paint Dampshield



1. CEMENT TILES & GALVANISED IRON

- A. Dulux Roofguard (Mid-sheen Finish)

2. INTERIOR WALLS

- A. Dulux Luxurious Silk (Mid-sheen)
- B. Dulux Easycare (Matt Finish)
- C. Dulux Acrylic PVA (Matt Finish)
- D. Dulux Pearlgló Water-Based (Mid-sheen) - High Humidity
- E. Dulux Pearlgló Solvent-Based (Mid-sheen) - High Humidity
- F. Dulux Bathroom+ (Soft Sheen) - High Humidity

3. CEILINGS

- A. Dulux Acrylic PVA (Matt Finish)
- B. Dulux Pearlgló Water-Based (Mid-sheen) - High Humidity
- C. Dulux Pearlgló Solvent-Based (Mid-sheen) - High Humidity
- D. Dulux Bathroom+ (Soft Sheen) - High Humidity

4. EXTERIOR WALLS

- A. Dulux Weatherguard Fine Textured (Matt Finish)
- B. Dulux Weatherguard Ultrasmooth (Low-sheen Finish)
- C. Dulux Wallguard (Suede Finish)
- D. Dulux Acrylic PVA (Matt Finish)

5. INTERIOR & EXTERIOR DOORS & DOOR FRAMES, WINDOWS FRAMES, CUPBOARDS, SKIRTINGS

- A. Dulux Pearlgló Water-Based (Mid-sheen Finish)
- B. Dulux Gloss Enamel (High Gloss Finish)
- C. Dulux Ducospray (Gloss Finish)

6. INTERIOR DOORS & DOOR FRAMES, CUPBOARDS, SKIRTINGS

- A. Dulux Pearlgló Solvent-Based (Mid-sheen Finish)
- B. Dulux Eggshell Enamel (Mid-sheen Finish)

7. CARE FOR WOOD - INTERIOR

- A. Dulux Woodgard Interior/Exterior Timbavarnish Solvent-Based (High Gloss Finish)
- B. Dulux Woodgard Interior/Exterior Timbavarnish Water-Based (Gloss Finish)
- C. Dulux Woodgard Interior Double Life Timbavarnish Solvent-Based (Gloss Finish)
- D. Dulux Woodgard Floorgard (Gloss Finish)



8. CARE FOR WOOD - EXTERIOR

- A. Dulux Woodgard Exterior Timbapreservative Solvent-Based (Low-sheen Finish)
- B. Dulux Woodgard Interior/Exterior Timbavarnish Solvent-Based (Gloss Finish)
- C. Dulux Woodgard Interior/Exterior Timbavarnish Water-Based (Gloss Finish)
- D. Dulux Woodgard Exterior Marine Timbavarnish Solvent-Based (Gloss Finish)
- E. Dulux Woodgard Exterior Rubbal Solvent-Based (Low-sheen Finish)

9. METAL

Mild Steel & Iron (Feros Metals) - with appropriate primer for new metal

- A. Dulux Gloss Enamel (High Gloss Finish)
- B. Dulux Pearlqlo Water-Based (Mid-sheen Finish)
- C. Dulux Eggshell Enamel (Mid-sheen Finish) (For interior only)
- D. Duco Spray (Gloss Finish)

Mild Steel & Iron (Feros Metals) - No primer required for new metal

- A. Hammerite Direct to Rust Hammered Finish

- B. Hammerite Direct to Rust Smooth Finish
- C. Hammerite Direct to Rust Aerosol
- D. Pearlqlo Solvent-Based (Mid-sheen Finish) (For interior only)

Galvanised Iron & Aluminium (Non-Ferrous Metals) - Priming Required for new metal

- A. Dulux Gloss Enamel (High Gloss Finish)
- B. Dulux Pearlqlo Water-Based (Mid-sheen Finish)
- C. Dulux Eggshell Enamel (Mid-sheen Finish) (For interior only)
- D. Hammerite Direct to Rust Hammered Finish
- E. Hammerite Direct to Rust Smooth Finish
- F. Hammerite Direct to Rust Aerosol
- G. Duco Spray (Gloss Finish)

Galvanised Iron & Aluminium (Non-Ferrous Metals) - No Primer required for new metal

- A. Dulux Pearlqlo Solvent-Based (Mid-sheen Finish) (For interior only)



WITH YOU AT EVERY STEP

Here's how Dulux can help you start a transformation

WHERE TO START

The experience of browsing, selecting and testing colours at home should be seen as enjoyable, rewarding and easy as possible.

Our approach works to engage you on an emotional level and tap into the fun of choosing colour and enjoyment of the process.

Below is a handy tool to help you narrow down your choices. There are a few essential questions that you need to ask yourself.

- ✓ Purpose of the space
- ✓ Personal style & mood
- ✓ Light quality
- ✓ Furniture, floor & fabrics
- ✓ Dimension & volume
- ✓ Colour selection

The visual appearance of each colour is affected by difference in gloss level between paint finishes.

Shown here are the six most popular sheen levels in the same colour to illustrate this affect.

Gloss level and colour may be affected by the texture and porosity of the surface and atmospheric conditions.



Inside be inspired by smart ideas paired with in-depth how-to sections to guide you through your renovation with practical support , including colour combinations and roomset visuals to get you excited, inspired and ready to take on any paint job.

JOIN THE COMMUNITY

Follow us on our DuluxSA social media platforms or sign up to our newsletter at dulux.co.za for interior inspiration straight to your inbox.



GET INSPIRED



FOLLOW OUR THREE STEPS TO FIND YOUR PERFECT COLOUR

1

EXPLORE OUR PAINT

Browse through our colour wall instore to find the perfect colour.



2

VISUALISE YOUR SHADES

Imagine how hues will look at home with the Visualizer App – download it free today.



3

TRY BEFORE YOU BUY

Finally, see your shortlisted colours on your wall. *Available in a variety of tinted colours from the Dulux Colour System.



EASY TO USE COLOUR COMBINATIONS

Mix and match shades to satisfy your needs



With dulux perfect colour combinations you can confidently combine colours with just 3 simple steps:

1 | PICK

Choose your favourite colour.


2 | MATCH

Find a perfect pair next to your favourite colour - one place up, down, left or right.

3 | FINISH

Complete your colour match with a corresponding white or neutral from the middle section (in the same vertical line as your favourite colour).

Pick, Match, Finish - Perfect!

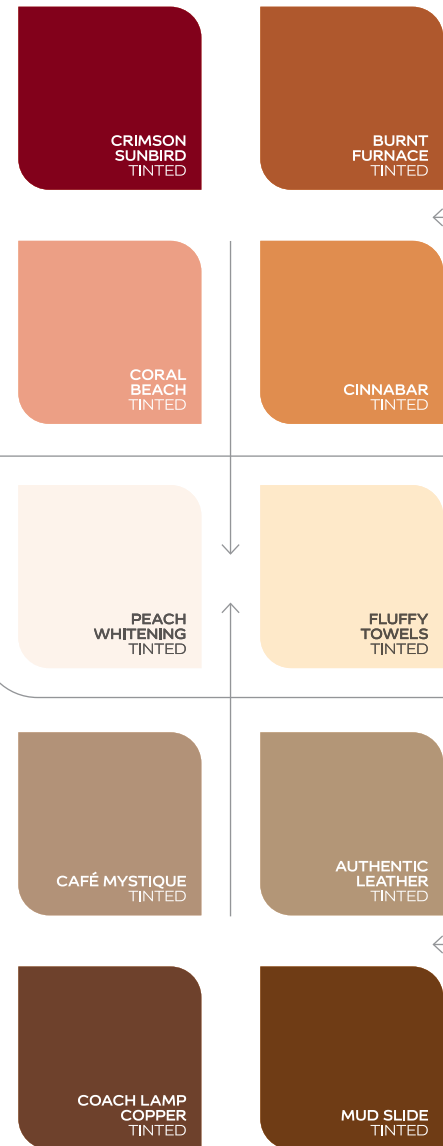



RICH BARCODE
TINTED



LEPRECHAUN LEAP
TINTED



SPLENDOR
TINTED



DRAGON FEEL
TINTED



MIDDY BLUE
TINTED



BLACKFOREST
GATEAU
TINTED



GLOW DELIGHT
TINTED



ENGLISH APPLE
TINTED



TRANQUIL
ORCHARD
TINTED



PEA WALL
TINTED



THE BLUES
TINTED



PINOT NOIR
TINTED



VANILLA
SENSATION
TINTED



EGGSHELL SHEEN
TINTED



MORNING HUSH
TINTED



SOFT GREEN
TINTED



CHILLY MORNING
TINTED



FRESH AIR
TINTED



SABLE SANDS
TINTED



OLIVE WASH
TINTED



SHEER STONE
TINTED



GRAVEL PIT
TINTED



SHADOW PLAY
TINTED



GREY COUTURE
TINTED



TURKISH BROWN
TINTED



GREEN GROVE
TINTED



GORGEOUS OLIVE
TINTED



CHEEKY GREY
TINTED



CONNECTICUT
BLUE
TINTED



PLUSH PEWTER
TINTED

HOW TO PREPARE A ROOM FOR PAINTING

DIY painting tips to help you every step of the way



USED PRODUCTS:

- ✓ Drop sheet
- ✓ Duster
- ✓ Bucket of warm water
- ✓ Spray bottle with sugar soap
- ✓ Sponge & Towel
- ✓ Filling knife & Filler
- ✓ Sanding block & Sanding paper
- ✓ Masking tape
- ✓ Primer
- ✓ Goggles, Rubber gloves & Face mask

Learn how to tape walls and ready any room for painting while keeping your house, and yourself, clean.

A lick of paint can transform an entire room, but it can be quite a messy process. Whether you're planning to paint a feature wall or a whole room: preparation is key. Read on and set yourself up for success by following our step by step process.




1. COVER THE FLOORS

Preventing paint spills is easy: simply move your furniture out of the way and place drop sheets on the floor. You can add a row of towels along the skirting boards to create a watertight seal. Need more grip? Just use masking tape to secure the sheets in place. Finally, cover the sockets and outlets with masking tape and put on your painting gear. Make sure your hands, eyes, nose and mouth are protected.

2. MIST THE WALL WITH SUGAR SOAP

Fill a spray bottle with warm water and add in the right amount of sugar soap. You'll find the proper mixing instructions on the sugar soap's packaging. Mix until dissolved and start spraying the wall in sections. Let it soak for about 15-30 minutes before wiping sugar soap off with clean water and a cloth.

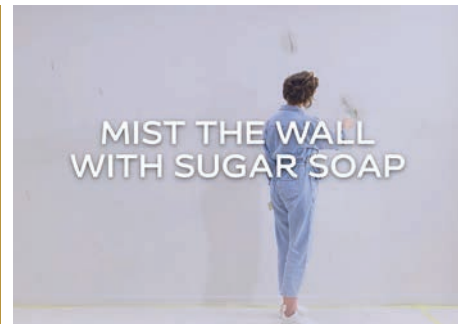


3. FILL HOLES & CRACKS

Now that the wall is clean, you can take a filling knife - or the plastic spreader that usually comes with the filler. Cracks are best widened with a sharp tool into a "V" shape to ensure effective filling. Plaster Primer on larger plaster cracks prior to filling. Assess how much filler you need and push the right amount into the hole or crack, spreading the edges in a feathering motion.

TIP: It's hard for filler to attach to a hairline crack, due to the limited surface area. To combat that, run a Stanley knife carefully along the fracture to ease it open. Dust it off, lightly spray with water and fill like normal.

4. SAND THE SURFACE UNTIL SMOOTH

After the filler has fully dried, wrap some Fine P100 sanding paper around a sanding block and start sanding the filled areas. Fine sanding paper is perfect for this job since you're only looking to smooth the wall surface slightly. Make sure to wipe away any dust before moving onto masking and priming.

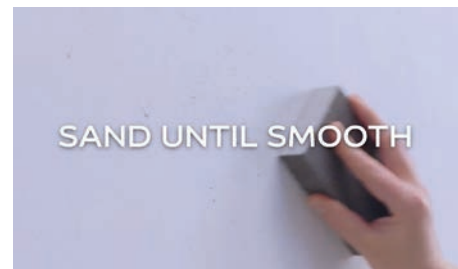

5. MASK THE EDGES

Apply masking tape to the horizontal edges of the wall, paying particular attention to skirting boards and window and door casings. Depending on your skill level, you might want to mask any vertical edges as well.




MASK THE EDGES



DUST

6. DUST DOWN THE WALL

Wipe down the wall with a duster or soft bristle broom. This will remove any lingering dirt leftover from the sanding.

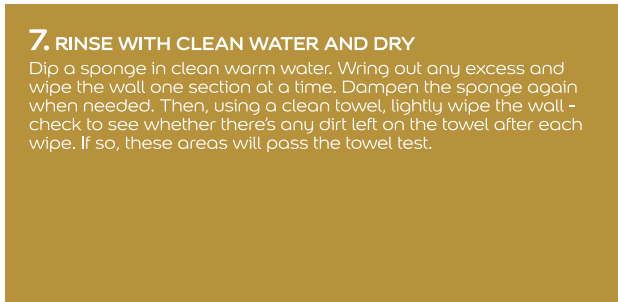


7. RINSE WITH CLEAN WATER AND DRY

Dip a sponge in clean warm water. Wring out any excess and wipe the wall one section at a time. Dampen the sponge again when needed. Then, using a clean towel, lightly wipe the wall - check to see whether there's any dirt left on the towel after each wipe. If so, these areas will pass the towel test.



RINSE WITH CLEAN WATER

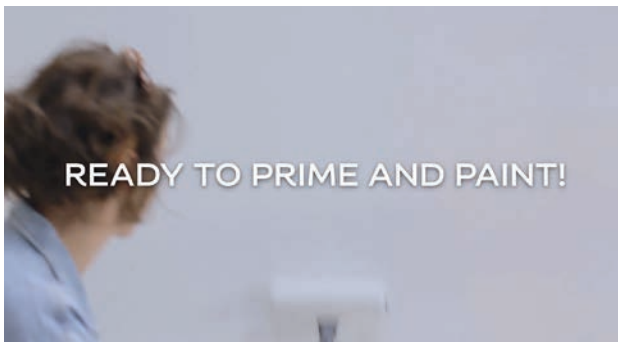

READY TO PRIME AND PAINT!

8. READY TO PRIME AND PAINT

Most fillers can be painted over straight after applying and drying, but some require a lick of primer in between. Simply check the instructions on the filler to be sure.

When it comes to choosing a primer: save yourself some hassle and select one in a similar shade as your interior paint. Then, apply the primer to all the filled and sanded areas. Wait for the primer to dry and you're good to paint!



DULUX LUXURIOUS SILK®

Premium Mid Sheen Finish | Interior Paint

- ✓ Supreme stain resistance & superior coverage.
- ✓ Excellent cleanability and wear resistance.
- ✓ Superior coverage.
- ✓ Low odour – rapid room re-entry.
- ✓ Superb appearance with even silky finish.
- ✓ Washable (complies with Class 1 scrub resistance).
- ✓ Wash and Wear Technology .
- ✓ Silver Ion Technology - Enhanced Protection.
- ✓ Green by Design Low VOC & Low Odour.
- ✓ 100% APEO Free.

Dulux Luxurious Silk® is the ideal choice for interiors of style and distinction as you transform your walls with long lasting luxury. A low odour premium interior wall paint with a mid sheen finish and supreme stain resistance.

Bedrooms, Living rooms, Hallways & Passages.





APPLY

Brush, Roller or
Airless Spray



COVERAGE

8 - 10m²/L Per Coat



DRYING TIME

60 min (Touch Dry)



RECOAT

4 Hours (At 23°C)



CLEANING

Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, ceiling boards and wooden surfaces provided that appropriate preparation is carried out.

Not suitable for use in kitchen and bathrooms. Refer to PearlGlo and Bathroom+.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

1Lt, 5Lt and 20Lt (White only) Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9 and Ultra Deep Base 6: 1Lt, 5Lt, 20Lt

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX EASYCARE®

Matt Finish | Interior Paint

- ✓ Washable & Tough.
- ✓ Stain Resist Technology - Supreme Stain Resistance - Repels Water Based Spills like Coffee, Wine, Tomato Sauce, Non Permanent Marker, Orange Juice and Mud.
- ✓ Longer lasting and scuff resistant.
- ✓ Hides plaster imperfections.
- ✓ Low odour – rapid room re-entry.
- ✓ Easy to clean - Wipes clean without shiny patches.
- ✓ Superior coverage.
- ✓ Ultra-Washable (complies with Class 1 scrub resistance).

Dulux EasyCare® with Stain Resist Technology™ is the ideal choice for hardworking homes and interiors; 20 times tougher than conventional interior matt paint. Dulux EasyCare® offers stain resistance and water repellence to keep your home looking better for longer. Matt paint is now even tougher and more washable.



N.B.C.
WHITE
TINTED



KITTEN
WHITE
TINTED



EUROPEAN
WHITE
TINTED



SAND
WHITE
TINTED



STONE
HARBOR
TINTED



APPLY

Brush, Roller or
Airless Spray



COVERAGE

8 - 10m²/L Per Coat



DRYING TIME

60 min (Touch Dry)



RECOAT

4 Hours (At 23°C)



CLEANING

Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, unglazed bricks, fibre cement, various composite boards, metal and wooden surfaces provided that appropriate preparation and priming is carried out.

Not suitable for use in kitchen and bathrooms. Refer to PearlGlo and Bathroom+.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

1Lt, 5Lt** and *20Lt White and Tint Bases
Pastel Base 7, Medium Base 8, Deep Base 9 and U/Deep Base 6. *Limited to White and Base 7 **White Only

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX BATHROOM+

Soft Sheen Finish | Interior Paint

- ✓ Moisture, steam & mould resistant - with Mouldtec™ formulation.
- ✓ Exceptionally durable.
- ✓ Low VOC levels-less than 16g/lt.

Dulux Bathroom+ is perfect for bathrooms with its washable soft sheen finish that will keep your walls looking clean and fresh for longer. The MouldTec™ formulation protects the paint against mould for 5 years and is also moisture and steam resistant.

Steamy bathroom walls and trims.

SILVER QUILL
TINTED

WEST COAST
GREY
TINTED

SPA BLUE
TINTED

GENTRY BLUE
TINTED

BROODING
STORM
TINTED



BRILLIANT
WHITE

DESIGNER
GREY
TINTED

PEBBLE
BLACK



APPLY
Brush, Roller or
Airless Spray



COVERAGE
8 - 10m²/L Per Coat



DRYING TIME
60 min (Touch Dry)



RECOAT
4 Hours (At 23°C)



CLEANING
Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, ceiling boards, provided that appropriate preparation and priming is carried out.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

White 1Ll, 2.5Ll Tint Base 7 2.5Ll

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX PEARLGLO™ WATER-BASED

Mid Sheen Finish | Interior & Exterior Paint

- ✓ Tough water-based satin enamel.
- ✓ Block Resistant Technology. APEO free.
- ✓ Low VOC.
- ✓ Non-Yellowing, Steam and Grease Resistant.
- ✓ Superior stain resistance to household stains.
- ✓ Knock, chip, and water resistant.
- ✓ Fast drying and low odour – rapid room re-entry.
- ✓ Superior exterior durability and UV resistant.
- ✓ Direct application to sound, correctly prepared previously painted enamel surfaces.

Dulux PearlGlo™ Water-Based Enamel offers you the trusted durability of traditional enamels. Yet, this water based formulation provides more versatility, easy clean up and low odour, and the luxury smoothness of its premium mid sheen finish will not yellow over time.



CLOUD
SAND
TINTED




CITY
LIFE
TINTED



BURMESE
BEIGE
TINTED



GREY
MOUNTAIN
TINTED



PEBBLE
BLACK



PEBBLE
BLACK



APPLY

Brush, Roller or
Airless Spray



COVERAGE

8 - 10m²/L Per Coat



DRYING TIME

60 min (Touch Dry)



RECOAT

4 Hours (At 23°C)



CLEANING

Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, ceiling boards, metal and wooden surfaces provided that appropriate preparation is carried out.

Perfect for:

Interior and exterior walls and trims, doors, frames, skirting, fascia boards, interior and exterior furniture and bathrooms.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

1lt, 5Lt White, Black and Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9 and Ultra Deep Base 6

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX PEARLGLO™ SOLVENT-BASED

Mid Sheen Finish | Interior Paint

- ✓ Convenient trim enamel - no stirring, no mess, no runs and Non-Drip with Excellent Polyurethane Protection and excellent resistance to yellowing.
- ✓ Can be used on most interior surfaces and dries to a smooth chip and stain resistant finish.
- ✓ Super Tough Technology.
- ✓ Non-Stick Technology.
- ✓ The product is highly recommended where a washable, tough, heat, steam, high humidity, greases, and mar resistant finish is required in kitchen and bathroom environments.
- ✓ No undercoat needed for masonry surfaces after priming.
- ✓ Multi-Surface No Primer application to correctly prepared Wood, Metal, Rigid PVC, and laminated boards.

Dulux PearlGlo™ Solvent-Based Enamel is a premium direct application (only to wood, metal, rigid PVC and laminated board, not masonry) polyurethane non drip mid sheen finish. This long-lasting formulation has excellent resistance to yellowing, leaving a premium nonstick finish. For hard working and steamy rooms.



CHELSEA
FOG
TINTED




SILVER
SENSATION
TINTED



OTTER
SILVER
TINTED



METAL
CLASP
TINTED



PEBBLE
BLACK



APPLY

Brush, Roller or
Airless Spray



COVERAGE

8 - 10m²/L Per Coat



DRYING TIME

4 Hours (Touch Dry)



RECOAT

18 Hours (At 23°C)



CLEANING

Turpentine

Tips & Advice

Preparing the surfaces:

Suitable for prepared and primed cement plaster, gypsum plaster, concrete, fibre cement, composite boarding (masonry). Direct application suitable for wood, metal, rigid PVC and laminated boards. A suitable substrate specific primer is recommended for superior performance and enhanced finish.

Perfect for:

Interior walls and trims, doors, frames, skirting, interior furniture, ceiling trims and all surfaces in bathrooms except floors.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

1lt, 5Lt White and Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9 and U/Deep Base 6

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.

HOW TO PAINT DOORS AND DOOR FRAMES

DIY doors and frames to help you every step of the way



USED PRODUCTS:

- ✓ Dust sheet
- ✓ Masking tape
- ✓ Screwdriver (if needed)
- ✓ Wood filler (if needed)
- ✓ Putty knife (if needed)
- ✓ Sandpaper and sanding block
- ✓ 50mm paintbrush
- ✓ AA sponge or mohair roller
- ✓ Paint suitable for wood
- ✓ Bucket with warm soapy water
- ✓ Damp cloth
- ✓ Dry towel
- ✓ Interior wood paint

We walk through the doors in our house countless times a day without giving them a second look. Shame, because doors can really pull a room together - completing the design you've always dreamed of. The best part is: you don't have to be a DIY genius to pull it off. We'll help you transform your door into a showstopper with just a lick of paint.



1. LAY DOWN DUST SHEETS


First, protect the surrounding area as well as yourself.

Place a dust or drop sheet on the floor, arranging it so that it skirts either side of the door frame, and secure it with masking tape if needed. Make sure you can't see any bits of exposed floor. Then, get your gloves, goggles and facemask, if you hadn't already.

2. REMOVE HARDWARE & MASK EDGES

Then, remove the handles and other hardware from the door and start masking the edges. Apply the masking tape not just to the wall, but also to the hinges and latches. Masking can be tedious, but believe us, it'll be worth it when you're painting freely without worrying about splattering.

TIP: Still worried about making a mess? See if you can take your door off the hinges. Grip it tightly on either side and simply lift it up, then set it aside on saw horses and paint freely.

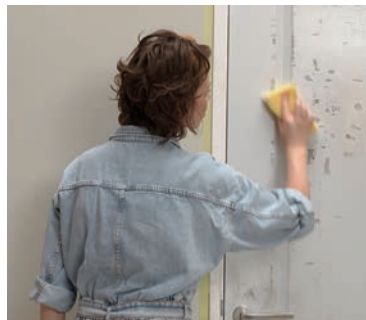

3. CLEAN & DRY

Fill a bucket with soapy water and use a sponge to scrub the door and frame from top to bottom. This will help remove dirt, stains, or grease that might show through or prevent the new coat of paint from taking hold. Next, pat everything dry with a clean towel, be sure to go over every part where you'll be applying paint. If you had to use quite a lot of detergent to remove all the marks, it's wise to rinse the surface with a damp cloth before drying.

TIP: Short on time? Use a microfiber towel! They absorb more moisture than regular cotton ones.

4. REPAIR CHIPS & FILL GAPS

Older door frames usually show some wear and tear, so make the necessary repairs to the frame and door.


Small chips and gouges can be repaired with wood filler and gaps between the frame and wall can be sealed with a line of paintable caulk if needed. If needed, get a putty knife, a piece of light sandpaper and just follow the manufacturer's instructions.



5. SAND EVERYTHING


Use a high-grit sandpaper to dull the appearance of the door and frame. 100-grit or higher is best as it will prevent you from scraping the wood underneath the paint. Run the sandpaper lightly over each surface, just enough to matt it up but not actually take off the existing paint.

TIP: Unpainted door frames won't typically require sanding. However, giving them a few light sweeps never hurts. It can even improve the paint's ability to adhere. For new metal and wooden surfaces use a primer prior to painting.

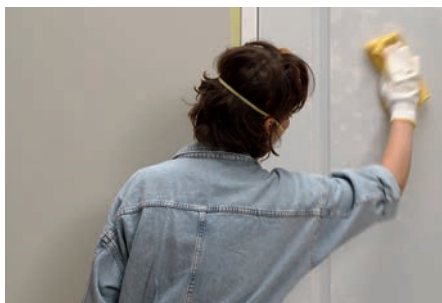

6. WIPE AWAY DUST


Get a clean, damp cloth and go over the door and frame once more to pick up any dust leftover from sanding. It's important to do so as paint adheres best to a spotless surface. Once you've achieved that, allow it to dry to the touch.

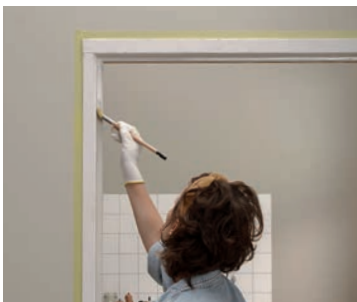

7. PAINT THE INSIDE OF THE FRAME

Cut in at the upper inner corner of the frame with the 50mm brush. Angle the tip of your brush so that it's aligned with the corner and begin moving down the frame with long, sweeping strokes. Once you've reached the bottom, repeat the process on the opposite side.

TIP: Hold your brush by the metal band just beneath the bristles rather than lower on the handle, that'll give you more precision and control.

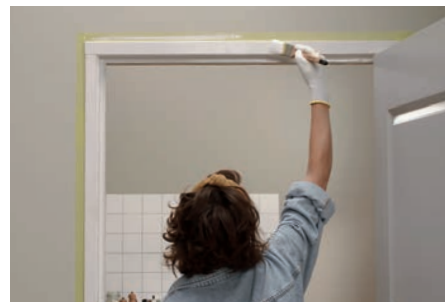

8. PAINT THE OUTSIDE OF THE FRAME

After you've finished the inside of your frame, work your way to the outside, the part that's visible when the door's closed. Once again, go from top to bottom in long linear movements.

TIP: Overlap your strokes by a few centimetres to avoid leaving seams and get that full coverage.



9. PAINT THE DOOR

With the door frame fully painted, it's time to tackle the door itself. Repeating the same technique, start in the corners and paint other difficult parts with a paintbrush. Afterwards, switch to a roller if you'd like to cover large areas quicker.

Apply a second coat, but not before the first coat feels dry to the touch before. This may take anywhere from 1-4 hours, depending on the type of paint you're using. Check the instructions to know for sure and steer clear in the meantime. Try to keep the newly painted door open for several days until cured.



DULUX ACRYLIC PVA®

Quality Matt Finish | Interior & Exterior Paint

- ✓ Green by Design Low VOC & Low Odour.
- ✓ Exceptional scrubbability.
- ✓ Enhanced stain resistance.
- ✓ Exceptional coverage and whiteness.
- ✓ Low odour.

Dulux Acrylic PVA® is a high-quality matt finish paint with exceptional scrubbability and enhanced stain resistance for long lasting durability. Suitable for interior and exterior usage. For ceilings, bedrooms, living rooms and exterior walls.

MORNING
ORCHID

ALMOND
WHITE

OAT
FIELDS

NATURAL
HESSIAN

IVORY

SOFT
STONE

URBAN VIEW
NEW

METRO BEIGE
NEW

CAPE FOG
NEW

GRANITE
PESTLE

VOGUE GREY
NEW

DARK SHORE
TINTED

BLACK



APPLY
Brush, Roller or
Airless Spray



COVERAGE
8 - 10m²/L Per Coat



DRYING TIME
60 min (Touch Dry)



RECOAT
4 Hours (At 23°C)



CLEANING
Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, ceiling boards and wooden surfaces provided that appropriate preparation is carried out.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

1Lt & 5Lt White and Standard Colours 20Lt White & selected Standard Colours Tint Bases Pastel Base 7: 1Lt, 5Lt 10Lt, 20Lt, Medium Base 8, Deep Base 9 and Ultra Deep Base 6: 1Lt, 5Lt, 20Lt

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX GLOSS ENAMEL®

Gloss | Interior & Exterior Paint

- ✓ Extremely durable.
- ✓ Colour fade resistant – protection against harsh UV rays.
- ✓ Scratch and stain resistant.
- ✓ Superb appearance with even gloss finish.

Dulux Gloss Enamel is a high quality enamel that is tough and colour fade resistant. For a high gloss finish that is the ultimate in protection for interior and exterior surfaces.





APPLY

Brush, Roller or
Airless Spray



COVERAGE

8 - 10m²/L Per Coat



DRYING TIME

4 Hours (Touch Dry)



RECOAT

18 Hours (At 23°C)



CLEANING

Turpentine

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, PVC, galvanised iron, ferrous metal and wooden surfaces provided that appropriate preparation and priming is carried out.

Perfect for:

Doors, trims, gates, garage doors, gutters, garden furniture, frame, skirtings and furniture.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

White and Standard Colours 1Lt, 5Lt White only 20Lt Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9 and Ultra Deep Base 6: 1Lt and 5Lt

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.




DULUX WEATHERGUARD FINE TEXTURED®

Textured Matt Finish | Exterior Paint

- ✓ Fine textured finish.
- ✓ Maxiflex™ - provides lasting elasticity to cover hairline cracks. * N.B. Hairline cracks do not exceed 0.2 mm.
- ✓ Unique texture hides plaster imperfections.
- ✓ Excellent weather resistance.
- ✓ Tough, durable, and water-resistant.
- ✓ 100% APEO Free.

Dulux Weatherguard Fine Textured is the premium choice in exterior textured coatings. The unique properties of Maxiflex make hairline cracks a problem of the past, and the textured finish ensures that minor plaster imperfections remain hidden.

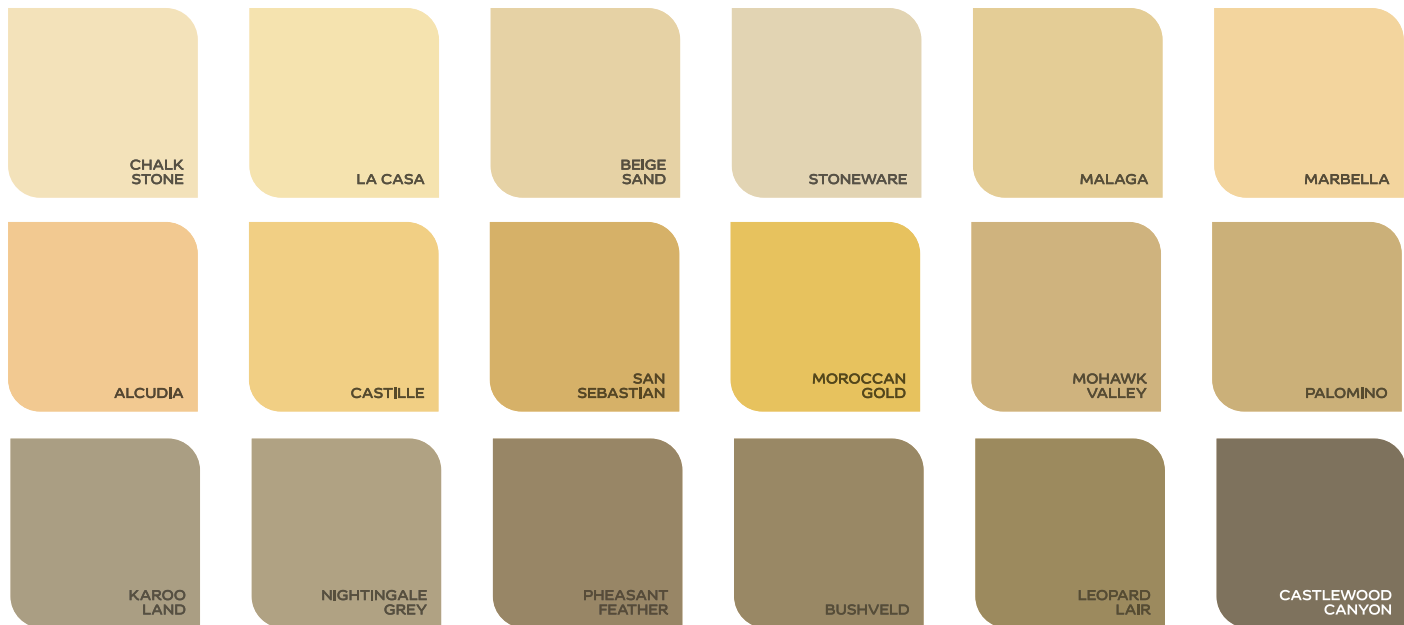



PORTLAND



VALERIAN
CLAY



CINNAMON
DOVE



SUMMER
SHOWERS



CAPE FOG



BERG
CLOUD



VELD
STORM



GREY
WIND



APPLY
Brush or Roller



COVERAGE
4 - 6m²/L Per Coat



DRYING TIME
60 min (Touch Dry)



RECOAT
4 Hours (At 23°C)



CLEANING
Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement ceiling boards, PVC and metal surfaces provided that appropriate preparation and priming is carried out.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

Standard Colours: 5Lt and 20Lt Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9: 5Lt and 20Lt. Ultra Deep Base 6: 20Lt Only

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX WEATHERGUARD ULTRA SMOOTH

Smooth Finish | Exterior Paint

- ✓ Attractive smooth coating.
- ✓ Sheds dirt easily with DIRT FLEX™.
- ✓ Excellent adhesion.
- ✓ Tough, Durable with excellent weather resistance.
- ✓ Lasting Flexibility.
- ✓ Superior alkali resistance.

Dulux Weatherguard® Ultra Smooth offers the ultimate in weather resistance whilst it's excellent dirt shedding properties ensure a smooth protective finish, no matter what the weather.

BRILLIANT
WHITE

CHALK
STONE

BEIGE
SAND

STONEWARE

MOHAWK
VALLEY

PALOMINO

MOROCCAN
GOLD

KAROO
LAND

CASTELWOOD
CANYON

PEBBLE
STRETCH



APPLY

Brush, Roller or
Airless Spray



COVERAGE

7 - 9m²/L Per Coat



DRYING TIME

60 min (Touch Dry)



RECOAT

4 Hours (At 23°C)



CLEANING

Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, PVC, galvanised iron, ferrous metal and wooden surfaces provided that appropriate preparation and priming is carried out.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

Standard Colours: 5Lt and 20Lt Tint Bases Pastel Base 7, Medium Base 8, Deep Base 9 and Ultra Deep Base 6: 5Lt and 20Lt

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.




DULUX WALLGUARD®

Mid Sheen Smooth Finish | Exterior Paint

- ✓ Durable dirt-shedding suede finish.
- ✓ Exceptional water repellence.
- ✓ Inherent mould resistance – Mouldex® technology.
- ✓ Excellent coverage.
- ✓ The hydrophobic mechanism makes it ideal for all types of exterior walls where moisture levels do not exceed 25%.

Dulux Wallguard® with breathable, water repelling properties allows for easy escape of harmful moisture; withstanding challenging weather and environment forces in high condensation exposed areas, whilst it's unique dirt shedding properties keep your walls looking cleaner for longer.

Exterior plastered walls.

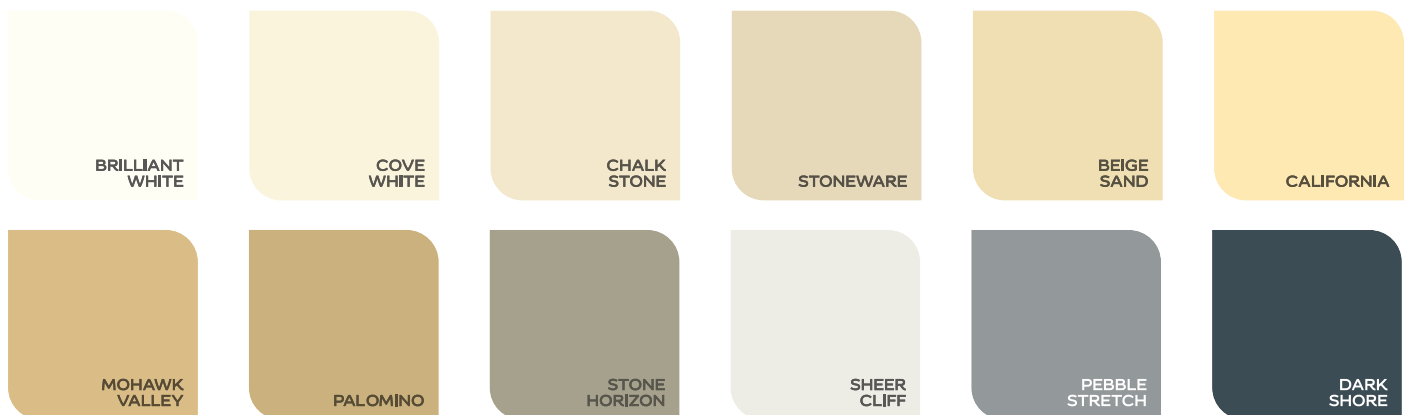



APPLY
Brush or Roller



COVERAGE
8 - 10m²/L Per Coat



DRYING TIME
60 Minutes (Touch Dry)



RECOAT
4 Hours (At 23°C)



CLEANING
Water

Tips & Advice

Preparing the surfaces:

Suitable for cement plaster, gypsum plaster, concrete, fibre cement, ceiling boards, PVC, metal and wooden surfaces provided that appropriate preparation and priming is carried out.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

Standard colours available in 5Lt and 20Lt Tint Bases
Pastel base 7, Medium base 8, Deep base 9:
5Lt and 20Lt Ultra deep base 6: 20Lt only

Storage conditions:

Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:

Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.



DULUX ROOFGUARD®

Mid Sheen | Roof Paint

- ✓ High quality pure acrylic finish.
- ✓ Solarflex™ – Colour Fast and UV resistant*.
- ✓ APEO Free – Safe for Rainwater Harvesting*.
- ✓ Waterproof when used with waterproofing mesh membrane.
- ✓ Superior Adhesion.
- ✓ Sheds Dirt.
- ✓ Excellent water resistance.

Dulux Roofguard® is the superior choice for roof protection, offering the best in durability. The unique properties of Solarflex® ensures that your colours stay truer for longer and that you're provided with the very best in UV protection.

ONLY available in standard colours.





APPLY

Brush, Roller or
Airless Spray



COVERAGE

8m²/L Per Coat
(Surface porosity & application
method dependent)



DRYING TIME

60 min (Touch Dry)



RECOAT

4 Hours (At 23°C)



CLEANING

Water

Tips & Advice

Preparing the surfaces:

Suitable for all types of cement roof tiles, fibre cement roof tiles and galvanised iron roofs surfaces provided that appropriate preparation and priming is carried out.

Also perfect for:

The application to other areas such as galvanised iron garage doors, gutters and downpipes and fibre cement garden pots.

Coats required:

Apply two to three finishing coats to new and previously coated surfaces to achieve a closed film and solid colour. The quantity of paint required can be obtained by measuring the floor area of the house covered by the roof, including overhang. Additional allowance of + 30% must be made for the pitch of the roof, plus 30% for the corrugated profile. Divide the total area by the spreading rate of the paint (8) to give an indication of the paint requirements per coat. Make allowance for thinning of the primer coat.

Additional Information

Available in a variety of tinted colours from the Dulux Colour System. Also available in Brilliant White.

Packaging:

5L and 20L

Storage conditions:





Store under cool dry conditions away from direct sunlight, heat and extreme cold.

Disclaimer:



Colour references are as accurate as modern printing will allow. Among others, the following factors may affect final colour appearance: product sheen and texture, colour and light reflections, application, surface texture and preparation.

PRE-PAINT


MULTIPURPOSE

PRODUCT	USE	DESCRIPTION	PACK SIZE	PRIMER/ UNDERCOAT
DAMPSHIELD®	To stop rising & penetrating damp on walls.	Dulux Dampshield is the quick & effective way to paint over damp interior & exterior walls. It utilises water-based technology that allows the product to be applied to a damp substrate containing up to 50% moisture, providing a sound foundation for long-lasting paintwork. Dampshield has a matt white finish that can be overcoated with most Dulux decorative finishes.	1L 5L 20L	
SMOOTHOVER®	A skimming plaster to give a perfectly smooth waterproof finish to uneven or rough plastered walls.	Dulux SmoothOver is the easy way to give a perfectly smooth, weatherproof finish to rough &/or uneven plaster. Ready mixed for easy use, it will skim up to 5mm thick & is specially formulated to adhere strongly to plaster. Simply skim it on & smooth it off; it will set hard within 4 hours to a white, weatherproof & alkali-resistant finish that does not need to be primed before painting. Given the complexity of the task, we recommend professional application. Refer to product technical data sheet. • Only available in white.	1.5KG 4KG 18KG 35KG	
MULTI-PURPOSE CRACKFILLER	The ideal versatile filler suitable for a variety of filling jobs.	Dulux Multipurpose Crackfiller is a tough & versatile filler that is suitable for all exterior & interior filling jobs up to 3mm thick. It sets in 60 minutes to a white & weather resistant finish that will not shrink or crack.	500G 2KG 10KG	
MULTI-PURPOSE CRACKFILLER READY MIXED	The ideal ready mixed versatile filler suitable for a variety of filling jobs.	Dulux Multipurpose Crackfiller Readymix is a tough & versatile filler that is suitable for all exterior & interior filling jobs up to 5mm. It sets in 60 minutes to a grey & weatherproof finish that will not shrink or crack.	500G 2KG	



MULTIPURPOSE

PRODUCT	USE	DESCRIPTION	PACK SIZE	PRIMER/ UNDERCOAT
QUICK SETTING CEMENT	The quick way to repair any masonry surface.	Dulux Quick Setting Cement is the quick way to repair any masonry surface - it sets rock hard in 10 minutes. Ideal for resetting bolts & brackets, it sets underwater, making it perfect for repairing drains & ponds.	1KG 2KG	
EXPANDING FOAM	Ideal for filling & sealing awkward gaps, hollows & cavities.	Dulux Expanding Foam is ideal for filling & sealing awkward gaps, hollows & cavities. It dispenses liquid foam deep into cavities & insulates against heat, sound & moisture. It can be easily trimmed & sanded - ready to be painted, filled or plastered.	825ML	

INTERIORS

PRODUCT	USE	DESCRIPTION	PACK SIZE	PRIMER/ UNDERCOAT
INTERIOR CRACKFILLER	The ideal versatile filler suitable for a variety of interior filling jobs.	Dulux Interior Crackfiller easily mixes to a smooth, creamy consistency. It is an ideal versatile filler suitable for a variety of jobs, including large areas up to 5mm deep. Special binders give excellent adhesion & a lasting fill that will not shrink or crack.	500G 2KG 10KG	

CLEANERS

PRODUCT	USE	DESCRIPTION	PACK SIZE	PRIMER/ UNDERCOAT
BRUSH CLEANER DEGREASER	The easiest way to get brushes clean.	Dulux Brush Cleaner Degreaser is the easiest way to get brushes & rollers really clean with no mess or paint residue. Its powerful paint softening solvents remove all traces of paint without harming the bristles, better than turps or thinners. Suitable for most household paints & varnishes.	500ML 1L	
SUGAR SOAP	A powerful cleaner designed for use on painted surfaces prior to re-decoration.	Dulux Sugar Soap Powder is a powerful pre-paint cleaner suitable for preparing any painted surface, be it a wall or ceiling. It degreases the surface & creates a "key" to promote adhesion & give a better paint finish.	500G	

PRIMERS & UNDERCOATS



SPECIALITY

PRODUCT	USE	PRIMER/ UNDERCOAT	TOPCOAT	INTERIOR	EXTERIOR	COLOUR & FINISH	PACK SIZE
ALUMINIUM PAINT	For primed metal & wooden surfaces where an aluminium finish is required.		✓	✓	✓	Silver High Sheen	1L 5L
BRICK DRESSING	Clear, glossy sealer for use on face or standard brick, stone & quarry stone surfaces.		✓	✓	✓	Clear High Gloss	5L
RAINSHIELD	Membrane-free, flexible fibre reinforced waterproofing paint for walls, roofs & parapets.	✓		✓	✓	White/Light Grey Low Sheen	5L 20L
QD ENAMEL	For protecting interior & exterior steel surfaces with exceptionally high gloss for long-lasting finish.		✓	✓	✓	Variety of Colours Gloss	1L 5L
WATER- PROOFING	Exterior waterproofing paint developed to be used with mesh membrane.		✓		✓	Grey, Red, Black, White, Green, Terracota & Charcoal Matt	5L

PRIMERS

PRODUCT	USE	PRIMER/ UNDERCOAT	TOPCOAT	INTERIOR	EXTERIOR	COLOUR & FINISH	PACK SIZE
BONDING LIQUID	Sealer for penetrating & bonding powdery surfaces.	✓		✓	✓	Clear Matt to Semi-Gloss	1L 5L
UNIVERSAL UNDERCOAT	Used as an undercoat to improve intercoat adhesion between the primer & decorative topcoats.	✓		✓	✓	White Matt	1L 5L
PLASTER PRIMER	Versatile high solid plaster primer for porous alkaline surfaces such as cement plaster, gypsum plaster, brick concrete, fibre cement and composite boarding.	✓		✓	✓	White Matt	1L 5L
GALVANISED IRON CLEANER	Removes oil, grease & dirt from new galvanised iron as well as weathered & pre-coated galvanised iron sheeting.			✓	✓	Red (Product gets washed off)	5L
GALVANISED IRON PRIMER	A versatile, premium quality anti-corrosive etch primer for interior or exterior galvanised iron & non-ferrous metals.	✓		✓	✓	Cream Matt to Low Sheen	1L 5L
WOOD PRIMER	An oil-based primer for interior and exterior wooden surfaces including chipboard surfaces.	✓		✓	✓	Pink Matt	1L 5L
STEEL PRIMER	Non-drip corrosion-resistant primer for iron and mild steel.	✓		✓	✓	Light Grey Matt to Low Sheen	1L
SUPERGRIP	Extreme adhesion, multi-surface water based primer, suitable for PVC gutters and down pipes, previously painted enamel surfaces, wood, ceramic tiles, new concrete, cement plaster, laminated boards, glass, galvanised iron.	✓		✓	✓	White Mid-Sheen	1L 5L
QD PRIMER	For the priming of interior and exterior steel surfaces when used in conjunction with QD Enamel.	✓		✓	✓	Red Oxide Matt	1L 5L
RUSTSHIELD™	A waterbased metal primer for correctly prepared metal surfaces. Provides anti-corrosion protection, excellent adhesion and a good base for top coating with both solvent and waterbased paints.	✓		✓	✓	Red Oxide / Black / *Light Grey (*20L only available in the Light Grey colour)	1L 5L *20L

HOW TO CLEAN AND STORE BRUSHES & ROLLERS

Easy ways to help you every step of the way



USED PRODUCTS:

- ✓ Zip-lock bag
- ✓ Newspaper
- ✓ Bucket with soapy water
- ✓ Paper towel
- ✓ Rubber band

Good paint tools come at a price, but brushes and rollers can be used time and time again if you store them properly. Master both cleaning and storage, and you'll be sure to get your money's worth.

Whether you just want to read up before starting a paint job or you have a used paint tool waiting to be wrapped: our step by step process will teach you the best way to do it in seconds.



1. REMOVE EXCESS PAINT

Removing paint is much easier when it's wet, so always clean your tools right after painting. First, scrape brushes against the edge of the can or tray to remove any excess paint. For rollers, you can use a paint scraper or filling knife to scrape it clean.

Then, grab an old newspaper and work out the remaining paint by brushing in an X-motion. Keep making X's until the brush is nearly dry. You can skip this step for rollers.

2. RINSE AND DRY

Remove any additional paint with a scraper. If necessary, use the appropriate solvent to remove the remaining paint. If you're using water-based paint, just wash the brushes and rollers with warm water and some soap until the water runs clear.

For solvent-based paint, you'll need paint thinner to do the trick. After cleaning with paint thinner, rinse the roller or brush thoroughly with warm water and soap to remove any trace of the thinner.

After rinsing, just wipe them dry on a clean piece of newspaper.






3. RESHAPE THE BRUSHES

Before storage, you'll want to mould the brushes back into their original shape. Just flick the brush against your hand a few times to align the bristles.






4. WRAP AND STORE

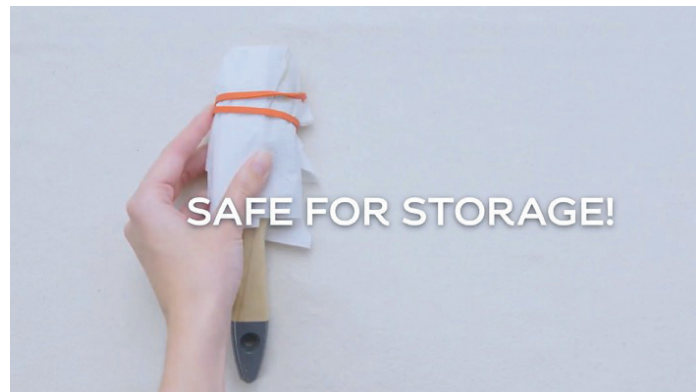





Place the washed brushes and rollers on paper towels in a dry area. Give them a few hours to dry completely and then wrap them in paper towel or newspaper, secured with a rubber band. Ready to be reused for a job in the future!

TIP: Looking to store your tools for a few hours or overnight? Just cover them in plastic wrap to seal them airtight in between jobs.



PRODUCT SUMMARY

	PRODUCT	DESCRIPTION	BEDROOMS	LIVING ROOMS	HALLWAYS	PASSAGES	DOORS	BATHROOMS	KITCHENS	FRAMES	SKIRTINGS	FASCIA BOARDS	INTERIOR/EXTERIOR FURNITURE	INTERIOR FURNITURE	PACK SIZE	PACK	
INTERIOR	LUXURIOUS SILK™	Dulux Luxurious Silk™ is the ideal choice for interiors of style & distinction as you transform your walls with long-lasting luxury. A low odour premium interior wall paint with a mid-sheen finish & supreme stain resistance.	✓	✓	✓	✓									1L 5L 20L*		
	EASYCARE®	Dulux EasyCare® with Stain Resist Technology™ is the ideal choice for hard-working homes and interiors; 20 times tougher* than conventional interior matt paint Dulux EasyCare® offers stain resistance and water repellence to keep your home looking better for longer. Matt paint now even tougher and more washable. *Based on reasearch.	✓	✓	✓	✓			✓						1L 5L 20L*		
	BATHROOM+	Dulux Bathroom+ is perfect for bathrooms with its washable soft sheen finish that will keep your walls looking clean and fresh for longer. The MouldTec™ formulation protects the paint against mould for 5 years and is also moisture and steam-resistant.							✓							1L 2.5L	
	PEARLGLO™ SOLVENT-BASED	Dulux PearlGlo™ Solvent-Based Enamel is a premium direct application (only to wood, metal, Rigid PVC and laminated board, not Masonry) polyurethane non-drip with a mid-sheen finish. This long-lasting formulation has excellent resistance to yellowing, leaving a premium nonstick finish. For hard-working and steamy rooms.	✓	✓	✓	✓	✓	✓	✓	✓	✓			✓	1L 5L		
INTERIOR/EXTERIOR	PEARLGLO™ WATER-BASED	Dulux PearlGlo™ Water-Based offers you the trusted durability of traditional enamels. Yet, this water-based formulation provides more versatility, easy clean-up and low odour, and the luxury smoothness of its premium mid-sheen finish will not yellow over time.	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		1L 5L		

	PRODUCT	DESCRIPTION	BEDROOMS	LIVING ROOMS	CEILINGS	EXTERIOR WALLS	DOORS	GATES	GARAGE DOORS	FRAMES	SKIRTINGS	GUTTERS	INTERIOR/EXTERIOR FURNITURE	PACK SIZE	PACK
INTERIOR/ EXTERIOR	ACRYLIC PVA	Dulux Acrylic PVA® is a high-quality matt finish with exceptional scrubability & enhanced stain resistance for long-lasting durability. Suitable for interior & exterior walls.	✓	✓	✓	✓								1L 5L 20L	
	GLOSS ENAMEL	Dulux Gloss Enamel is a high-quality enamel that is tough & colour fade-resistant. For a high gloss finish that's the ultimate in protection for interior & exterior surfaces.						✓	✓	✓	✓	✓	✓	1L 5L 20L	
	PRODUCT	DESCRIPTION	EXTERIOR WALLS	FIBRE CEMENT ROOFS	GALVANISED ROOFS	CEMENT TILE ROOFS	GALVANISED IRON	GARAGE DOORS	SIDE CLADDING	DOWNPIPES	EXTERIOR FURNITURE	GUTTERS	PACK SIZE	PACK	
EXTERIOR	WEATHERGUARD FINE TEXTURED	Dulux Weatherguard Fine Textured® is the premium choice in exterior textured coatings. The unique properties of Maxiflex™ make hairline cracks a problem of the past & the textured finish ensures that minor plaster imperfections remain hidden.	✓										5L 20L		
	WALLGUARD	Dulux Wallguard® with hydrophobic mechanism allows for the easy escape of harmful moisture, while its unique dirt-shedding properties keep your walls looking cleaner for longer.	✓										5L 20L		
	ROOFGUARD	Dulux Roofguard® is the superior choice for roof protection, offering the best in durability. The unique properties of Solarflex® ensure that your colours stay truer for longer & that you are provided with the very best in UV protection. Spreading Rate: 4-5m² on porous surfaces & 7-8m² on non-porous surfaces depending on surface profile & application method.		✓	✓	✓	✓	✓	✓	✓	✓	✓	5L 20L		
	WEATHERGUARD ULTRA SMOOTH	Dulux Weatherguard® Ultra Smooth offers the ultimate in weather resistance whilst it's excellent dirt shedding properties ensure a smooth protective finish, no matter what the weather.	✓										5L 20L		



www.dulux.co.za

Dulux Paints have been specially developed to offer a high-quality range that will provide a longlasting professional finish. AkzoNobel, The AkzoNobel logo, the Flourish logo, the dog logo, Dulux, the Dulux Promise logo, Luxurious Silk, PearlGlo, Woodgard®, Roofguard®, Solarflex™, Weatherguard Fine Texture®, Maxiflex™, Wallguard®, Wash and Wear, MouldTec, Visualizer and all distinctive colour names are trademarks of the AkzoNobel Group® AkzoNobel 2024.

**For product information or painting advice, please contact Dulux Careline on
0860 330 111 or visit our website at www.dulux.co.za**

Colour Display • 08/24



① RAS40782 01.24

AkzoNobel

6439945